


COPPER TUBULAR CABLE LUGS

TUBULAR CABLE LUGS HEAVY DUTY LONG BARREL

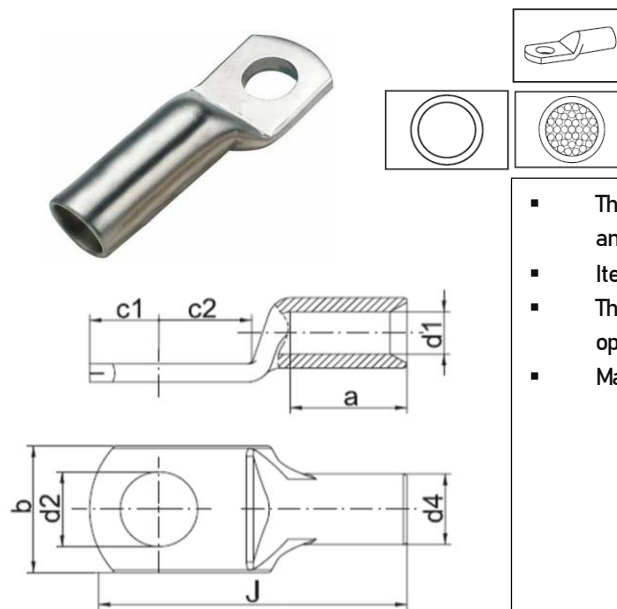



PESSRL constructs its Heavy Duty Copper Tubular Terminals from ETP grade copper, featuring an impressive purity of 99.96% and a minimum conductivity of 97.6% IACS.

- The terminal is annealed to prevent cracking during crimping, and a chamfered mouth facilitates easy cable insertion.
- Item identification on cable lug
- The terminal is coated with tin to prevent oxidation and ensure optimal corrosion resistance.
- Material - Copper DIN EN 13600-2002

Nominal Cross Section mm ²	PESSRL CAT NO.	Size of Bolt Die	d1	d4	b	a	c1	c2	l
25	PESCUS-282-6	6.2	7	9	13	16	8	12	41
	PESCUS-282-8	8.2	7	9	13	16	8	12	41
35	PESCUS-283-6	6.2	8	10.6	15	20	9	14	48
	PESCUS-283-8	8.2	8	10.6	15	20	9	14	48
	PESCUS-283-10	10.2	8	10.6	15	20	9	14	48
50	PESCUS-284-6	6.2	9.2	12.2	17	26	10	16	59
	PESCUS-284-8	8.2	9.2	12.2	17	26	10	16	59
	PESCUS-284-10	10.2	9.2	12.2	17	26	10	16	59
70	PESCUS-285-8	8.2	11.5	15	20	28	12	19	66
	PESCUS-285-10	10.2	11.5	15	20	28	12	19	66
95	PESCUS-286-8	8.2	12.8	17	24	32	12	20	74
	PESCUS-286-10	10.2	12.8	17	24	32	12	20	74
	PESCUS-286-12	12.7	12.8	17	24	32	12	20	74
120	PESCUS-287-8	8.2	14.8	19.6	28	35	14	23	82
	PESCUS-287-10	10.2	14.8	19.6	28	35	14	23	82
	PESCUS-287-12	12.7	14.8	19.6	28	35	14	23	82
150	PESCUS-288-8	8.2	16	21.2	30	38	14	24	86
	PESCUS-288-10	10.2	16	21.2	30	38	14	24	86
	PESCUS-288-12	12.7	16	21.2	30	38	14	24	86
185	PESCUS-289-8	8.2	18	24	34	43	17	23	95
	PESCUS-289-10	10.2	18	24	34	43	17	23	95
	PESCUS-289-12	12.7	18	24	34	43	17	23	95
240	PESCUS-290-8	8.2	22	28	40	50	20	30	112
	PESCUS-290-10	10.2	22	28	40	50	20	30	112
	PESCUS-290-12	12.7	22	28	40	50	20	30	112
	PESCUS-290-16	16.2	22	28	40	50	20	30	112
300	PESCUS-291-10	10.2	23.5	30	43	54	24	28	120
	PESCUS-291-12	12.7	23.5	30	43	54	24	28	120
	PESCUS-291-16	16.2	23.5	30	43	54	24	28	120

COPPER TUBULAR CABLE LUGS

TUBULAR CABLE LUGS HEAVY DUTY LONG BARREL

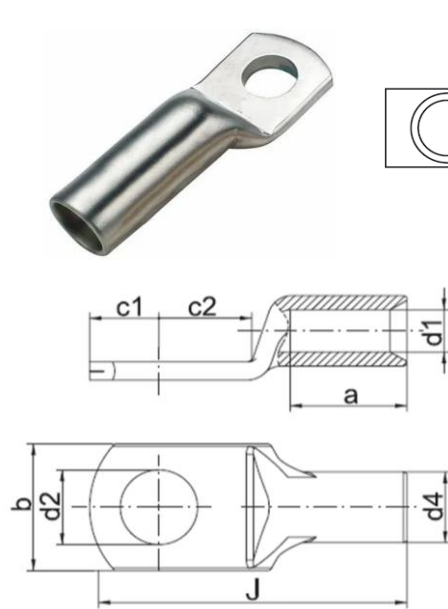

PESSRL constructs its Heavy Duty Copper Tubular Terminals from ETP grade copper, featuring an impressive purity of 99.96% and a minimum conductivity of 97.6% IACS.

- The terminal is annealed to prevent cracking during crimping, and a chamfered mouth facilitates easy cable insertion.
- Item identification on cable lug
- The terminal is coated with tin to prevent oxidation and ensure optimal corrosion resistance.
- Material - Copper DIN EN 13600-2002

Nominal Cross Section mm ²	PESSRL CAT NO.	Size of Bolt Die	d1	d4	b	a	c1	c2	l
400	PESCUS-292-12	12.7	28	36	50	62	24	36	140
	PESCUS-292-16	16.2	28	36	50	62	24	36	140
	PESCUS-292-20	20.3	28	36	50	62	24	36	140
500	PESCUS-293-16	16.2	31	41	59	60	24	36	140
	PESCUS-293-20	20.3	31	41	59	60	24	36	140
630	PESCUS-294-16	16.2	35	45	65	69	35	34	154
	PESCUS-294-20	20.3	35	45	65	69	35	34	154
800	PESCUS-295	-	39	51	74	77	-	-	180
1000	PESCUS-296	-	43.5	57	82	100	-	-	220