


COPPER TUBULAR CABLE LUGS

TUBULAR CABLE LUGS TWO HOLES

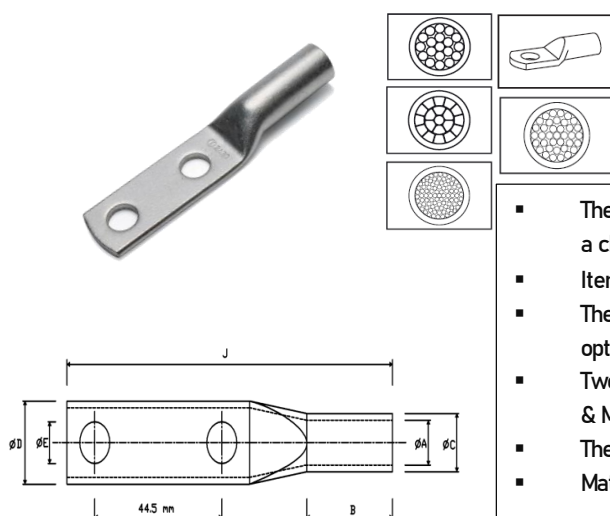

PESSRL long palm double stud tubular terminal ends, which also known as "Non-Rotating Terminals" are manufactured with ETP grade copper with purity 99.96% having conductivity Min. 97.6% IACS

- The terminal is annealed to prevent cracking during crimping, and a chamfered mouth facilitates easy cable insertion.
- Item identification on cable lug
- The terminal is coated with tin to prevent oxidation and ensure optimal corrosion resistance.
- Two hole ensures non rotation in equipments such as transformer & Moving equipments where vibration is critical.
- The hole size punch according as per requirement.
- Material - Copper BS 1977/IS 191 (PART-V)

Nominal Cross Section mm ²	PESSRL CAT NO.	Size of Bolt Die	A	C	D	I2	I
16	PESTT-16-10	10.5	5.4	7.6	14.5	16	100
25	PESTT-25-10	10.5	6.8	8.8	15	16	100
35	PESTT-35-10	10.5	8.2	10.6	16.5	16	100
50	PESTT-50-10	10.5	9.5	12.4	17	25	109
50	PESTT-50-13	13	9.5	12.4	17	25	109
70	PESTT-70-10	10.5	11.3	14.7	21	30	114
70	PESTT-70-13	13	11.3	14.7	21	30	114
95	PESTT-95-10	10.5	13.5	17.4	25	30	116
95	PESTT-95-13	13	13.5	17.4	25	30	116
120	PESTT-120-10	10.5	15	19.4	27.5	35	122
120	PESTT-120-13	13	15	19.4	27.5	35	122
150	PESTT-150-10	10.5	16.5	21.2	30	40	126
150	PESTT-150-13	13	16.5	21.2	30	40	126
185	PESTT-185-10	10.5	18.5	23.5	33.5	42	132
185	PESTT-185-13	13	18.5	23.5	33.5	42	132
240	PESTT-240-10	10.5	21	26.5	38.5	50	143
240	PESTT-240-13	13	21	26.5	38.5	50	143
300	PESTT-300-13	13.7	23.5	30	43	55	144
400	PESTT-400-13	13.7	28.5	36.5	52.5	60	149
500	PESTT-500-13	13.7	30	39	56	65	160
630	PESTT-630-13	13.7	35	45	58	75	160