



## COPPER CABLE CONNECTOR INSULATED CABLE END SEALING FERRULES WITH INSULATION

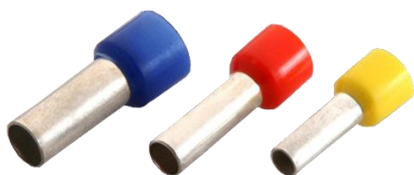

The PESSRL End sealing ferrules with insulation are essential components designed to provide a secure and protective finish for the ends of cables or wires. These ferrules are commonly used in electrical and electronic applications to prevent fraying, enhance safety, and ensure reliable connections. Constructed from ETP grade copper with a purity of 99.96%, it boasts a minimum conductivity of 97.6% IACS.

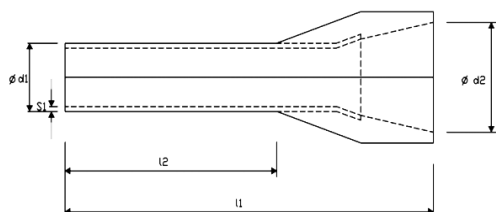

- The insulated design offers added protection against environmental factors such as moisture, dust, and abrasion, while also reducing the risk of accidental short circuits and electrical shocks. Constructed from high-quality materials and featuring a precise fit, end sealing ferrules ensure a clean, secure termination that maintains optimal conductivity and mechanical strength.
- The terminal is coated with tin to prevent oxidation and ensure optimal corrosion resistance.
- Material - Copper (ETP) IS 1897

Nominal Cross Section mm <sup>2</sup>	PESSRL CAT NO.	d1	d2	l1	l2	s1	COLOR
0.5	PESEI-0.5-8	1	2.6	14	8	0.15	
	PESEI-0.5-10	1	2.6	16	10	0.15	
0.75	PESEI-0.75-8	1.2	2.8	14	8	0.15	
	PESEI-0.75-10	1.2	2.8	16	10	0.15	
	PESEI-0.75-12	1.2	2.8	18	12	0.15	
1	PESEI-1-8	1.4	3	14	8	0.15	
	PESEI-1-10	1.4	3	16	10	0.15	
	PESEI-1-12	1.4	3	18	12	0.15	
1.5	PESEI-1.5-8	1.7	3.5	14	8	0.15	
	PESEI-1.5-10	1.7	3.5	16	10	0.15	
	PESEI-1.5-12	1.7	3.5	18	12	0.15	
2.5	PESEI-2.5-8	2.2	4.2	14	8	0.15	
	PESEI-2.5-10	2.2	4.2	16	10	0.15	
	PESEI-2.5-12	2.2	4.2	18	12	0.15	
4	PESEI-4-8	2.8	4.8	16	8	0.2	
	PESEI-4-10	2.8	4.8	17	10	0.2	
	PESEI-4-12	2.8	4.8	20	12	0.2	
6	PESEI-6-10	3.5	6.3	17	10	0.2	
	PESEI-6-12	3.5	6.3	20	12	0.2	
10	PESEI-10-12	4.5	7.6	22	12	0.2	
25	PESEI-25-22	7.3	11.2	34	22	0.2	
35	PESEI-25-18	8.3	12.7	40	22	0.2	