


BI-METALLIC LUG

CABLE BI-METALLIC CONNECTOR

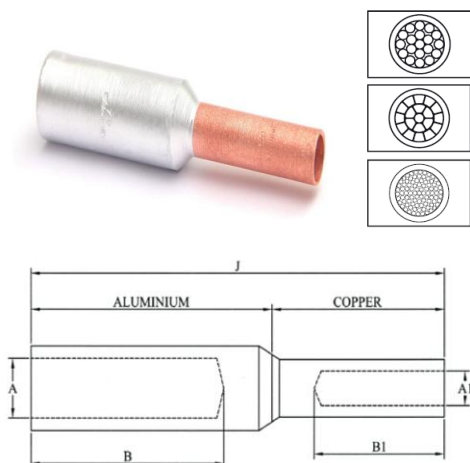

PESSRL CABLE BI-METALLIC CONNECTOR "For non-tension connections of aluminum conductors to DIN EN 60228 and aluminum cables to DIN EN 50182, for copper round conductors, such as those to DIN EN 60228 Cl. 1, 2, 5, and 6, for non-tension copper cables, such as those to DIN 48201-1, for pre-rounded sector-shaped conductors, with tube dimensions according to DIN 46235 parts 1 and 2, along with a code number for clear tool assignment."

- Simple cable entry due to internal chamfer
- For connecting non-tension aluminium and copper conductors
- Easy to process due to crimp markings
- Material: E-aluminium, Copper (EN13600)
- Surface: Bright

PESSRL CAT NO.	CABLE AREA (SQMM)		A	B	A1	B1	J
	ALUMINIUM	COPPER					
PESBCC-16-16	16	16	5.5	43	5.6	29	88
PESBCC-25-16	25	16	6.5	43	5.6	29	88
PESBCC-25-25	25	25	6.5	43	7	29	88
PESBCC-35-16	35	16	8	43	5.6	29	88
PESBCC-35-25	35	25	8	43	7	29	88
PESBCC-35-35	35	35	8	43	8	29	88
PESBCC-50-25	50	25	9	43	7	29	88
PESBCC-50-35	50	35	9	43	8	29	88
PESBCC-50-50	50	50	9	43	9.5	29	88
PESBCC-70-35	70	35	11	43	8	29	88
PESBCC-70-50	70	50	11	43	9.5	29	88
PESBCC-70-70	70	70	11	43	11	33	90
PESBCC-95-50	95	50	12.5	43	9.5	29	88
PESBCC-95-70	95	70	12.5	43	11	33	90
PESBCC-95-95	95	95	12.5	43	13	33	90
PESBCC-120-70	120	70	13.7	59	11	33	107
PESBCC-120-95	120	95	13.7	59	13	33	107
PESBCC-120-120	120	120	13.7	59	14.2	33	107
PESBCC-150-95	150	95	15.5	59	13	33	107
PESBCC-150-120	150	120	15.5	59	14.2	33	107
PESBCC-150-150	150	150	15.5	59	16	33	107
PESBCC-185-120	185	120	17	59	14.2	33	107
PESBCC-185-150	185	150	17	59	16	33	107
PESBCC-185-185	185	185	17	59	18	43	120
PESBCC-240-150	240	150	19.5	59	16	33	107
PESBCC-240-185	240	185	19.5	59	18	43	120
PESBCC-240-240	240	240	19.5	59	20	43	120