



COPPER U-CUT CABLE LUG

CRIMPING TYPE TINNED COPPER U-CUT CABLE TERMINAL END

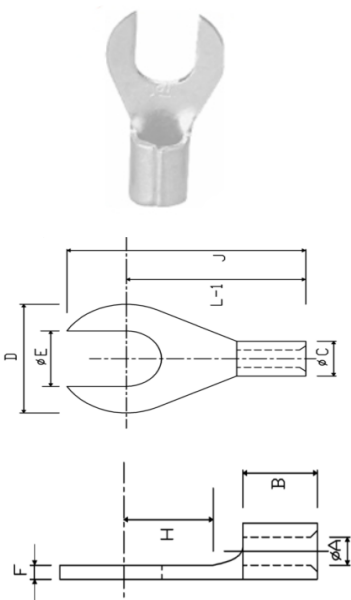

PESSRL U-cut lugs are designed for efficient and secure electrical connections in various industrial and commercial applications. These lugs are commonly used in power distribution systems, machinery, and automotive wiring, where they provide a reliable method for connecting cables to terminals, bus bars, or other fixed points.

- The U-cut design allows for easy installation by sliding the lug over a bolt or stud and securing it with a nut, making them ideal for applications where quick and reliable connections are essential.
- U-cut lugs are valued for their versatility, ease of use, and ability to maintain a strong connection under mechanical stress and vibration..
- The terminal barrel is brazed and soft annealed, Which means that the terminal can be crimped either direction.
- All the terminals are tin plated to avoid oxidation and to achieve maximum corrosion protection.
- Material: Copper (ETP) IS 1897
- Finish: Electro tin to BS 1872 (1984)

Nominal Cross Section mm ²	PESSRL CAT NO.	Size of Bolt Die	A	C	D	F	B	H	I-1	J
1.5	PESU-7235	3.1	1.6	3.2	6	0.8	5	4	11	14
	PESU-7240	3.6	1.6	3.2	6	0.8	5	4	11	14
	PESU-7241	3.1	1.6	3.2	6.8	0.8	5	4.6	9.6	13
	PESU-7244	3.6	1.6	3.2	6.8	0.8	5	4.6	9.6	13
	PESU-7237	4.1	1.6	3.2	7	0.8	5	5	11	14
	PESU-7236	4.1	1.6	3.2	8	0.8	5	5	12	16
	PESU-7238	5.1	1.6	3.2	10	0.8	5	6	13	18
	PESU-7861	6.1	1.6	3.2	10	0.8	5	6	13	18
2.5	PESU-7862	3.1	2.3	3.9	6.5	0.8	5	3.5	9.5	12.7
	PESU-7863	3.6	2.3	3.9	6.5	0.8	5	3.5	9.5	12.7
	PESU-7239	4.1	2.3	3.9	8	0.8	5	5	12	16
	PESU-7242	5.1	2.3	3.9	10	0.8	5	7	13	18
	PESU-7864	6.1	2.3	3.9	10	0.8	5	7	13	18
4-6	PESU-7243	4.1	3.5	5.5	8	1	6	5	13	17
	PESU-7245	4.1	3.5	5.5	10	1	6	5	14	19
	PESU-7246	5.1	3.5	5.5	10	1	6	5	14	19
	PESU-7247	5.1	3.5	5.5	10	1	6	7	16	22
	PESU-7248	6.1	3.5	5.5	12	1	6	7	16	22
10	PESU-7865	4.1	4.3	6.3	10	1	8	7	17	22
	PESU-7866	5.1	4.3	6.3	10	1	8	7	17	22
	PESU-7867	6.1	4.3	6.3	12	1	8	7	17	23
	PESU-7868	8.1	4.3	6.3	16	1	8	7	19	27
16	PESU-7869	5.1	5.6	8	10	1.2	10	6	19	24
	PESU-7870	6.1	5.6	8	12	1.2	10	6	20	26
	PESU-7871	8.1	5.6	8	16	1.2	10	8	22	30
	PESU-7872	8.1	5.6	8	18	1.2	10	10	24	33