

## COPPER PIN CABLE LUG


### CRIMPING TYPE INSULATED TINNED COPPER PIN CABLE TERMINAL END WITH METAL REINFORCEMENT



Type-I



Type-II

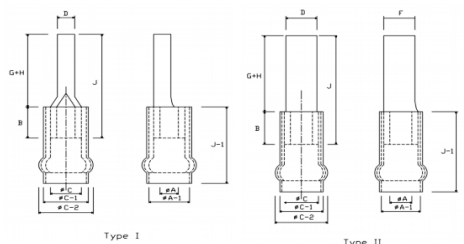

Type I

Type II

PESSRL Pin lugs with MR (Modified Rubber) insulation are designed to meet the demands of a wide range of electrical applications where durability and flexibility are crucial. Ideal for use in industrial machinery, automotive wiring, and low-voltage systems, these lugs provide robust and secure connections in environments where mechanical stress and temperature fluctuations are prevalent.

- All the terminals are tin plated to avoid oxidation and to achieve maximum corrosion protection.
- The insulation sleeve, often made from PVC, protects against moisture, chemicals, and abrasion, ensuring long-lasting performance and reliability in diverse environments.
- Material: Copper (ETP) IS 1897
- Finish: Electro tin to BS 1872 (1984)
- Color coding of insulation sleeve

■ 1.5     ■ 2.5     ■ 4-6

Nominal Cross Section mm <sup>2</sup>	PESSRL CAT NO.	TYPE	A	C	D	F	B	G+H	J	C-1	A-1	C-2	COLOR
1.5	PESPR-26	I	1.6	3.2	1.9	0.8	5	10	17	4.8	3.6	5.4	<span style="color: red;">■</span>
	PESPR-40	II	1.6	3.2	3.1	0.8	5	10	17	4.8	3.6	5.4	<span style="color: red;">■</span>
2.5	PESPR-27	I	2.3	3.9	1.9	0.8	5	10	17	5.5	4.4	6	<span style="color: blue;">■</span>
	PESPR-27/A	I	2.3	3.9	1.9	0.8	5	17	24	5.5	4.4	6	<span style="color: blue;">■</span>
4	PESPR-28	II	2.3	3.9	3.1	0.8	5	10	17	5.5	4.4	6	<span style="color: blue;">■</span>
	PESPR-29	I	2.9	4.9	2.7	1	6	10	20	7.1	6.4	8.6	<span style="color: yellow;">■</span>
6	PESPR-30	II	3.6	5.6	5.1	1	6	10	20	7.1	6.4	8.6	<span style="color: yellow;">■</span>
	PESPR-31	I	3.6	5.6	2.7	1	6	10	20	7.1	6.4	8.6	<span style="color: yellow;">■</span>
	PESPR-32	I	4	6	2.7	1	6	10	20	7.1	6.4	8.6	<span style="color: yellow;">■</span>