




COPPER RING CABLE LUG

CRIMPING TYPE TINNED COPPER RING CABLE TERMINAL END



PESSRL Ring Type Light Duty Cable Lugs are widely used in various applications such as power distribution, industrial machinery, automotive systems, and renewable energy installations, where durable and efficient electrical connections are essential.


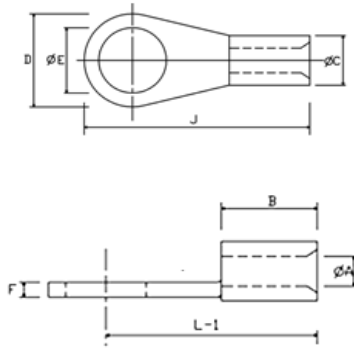


- The terminal barrel is brazed and soft annealed, Which means that the terminal can be crimped either direction.
- All the terminals are tin plated to avoid oxidation and to achieve maximum corrosion protection.
- Material: Copper (ETP) IS 1897
- Finish: Electro tin to BS 1872 (1984)


Nominal Cross Section mm ²	PESSRL CAT NO.	Size of Bolt Die	A	C	D	F	B	L-1	J
1.5	PESR-7153	3.2	1.6	3.2	6.8	0.8	5	9.6	13
	PESR-7048	3.7	1.6	3.2	6.8	0.8	5	9.6	13
	PESR-7049	4.2	1.6	3.2	6.8	0.8	5	9.6	13
	PESR-7154	4.2	1.6	3.2	7	0.8	5	11	14.5
	PESR-7103	2.2	1.6	3.2	6	0.8	5	11	14
	PESR-7000	2.6	1.6	3.2	6	0.8	5	11	14
	PESR-7001	3.2	1.6	3.2	6	0.8	5	11	14
	PESR-7002	3.7	1.6	3.2	6	0.8	5	11	14
	PESR-7003	4.2	1.6	3.2	6	0.8	5	11	14
	PESR-7104	3.2	1.6	3.2	8	0.8	5	12	16
	PESR-7004	4.2	1.6	3.2	8	0.8	5	12	16
	PESR-7005	5.2	1.6	3.2	8	0.8	5	12	16
	PESR-7105	4.2	1.6	3.2	10	0.8	5	13	18
	PESR-7006	5.2	1.6	3.2	10	0.8	5	13	18
	PESR-7007	6.4	1.6	3.2	10	0.8	5	13	18
	PESR-7106	6.4	1.6	3.2	12	0.8	5	12	18
	PESR-1.5-8	8.2	1.6	3.2	12	0.8	5	16	22
2.5	PESR-7107	3.2	2.3	3.9	6.5	0.8	5	9.5	12.7
	PESR-7008	3.7	2.3	3.9	6.5	0.8	5	9.5	12.7
	PESR-7108	3.7	2.3	3.9	8	0.8	5	12	16
	PESR-7009	4.2	2.3	3.9	8	0.8	5	12	16
	PESR-7010	5.2	2.3	3.9	8	0.8	5	12	16
	PESR-7109	5.2	2.3	3.9	10	0.8	5	13	18
	PESR-7011	6.4	2.3	3.9	10	0.8	5	13	18
	PESR-7110	5.2	2.3	3.9	12	0.8	5	16	22
	PESR-7012	6.4	2.3	3.9	12	0.8	5	16	22
	PESR-7013	8.2	2.3	3.9	12	0.8	5	16	22
	PESR-7111	6.4	2.3	3.9	16	0.8	5	17	25
	PESR-7014	8.2	2.3	3.9	16	0.8	5	17	25

COPPER RING CABLE LUG

CRIMPING TYPE TINNED COPPER RING CABLE TERMINAL END



PESSRL Ring Type Light Duty Cable Lugs are widely used in various applications such as power distribution, industrial machinery, automotive systems, and renewable energy installations, where durable and efficient electrical connections are essential.


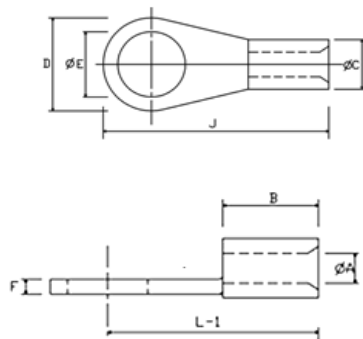


- The terminal barrel is brazed and soft annealed, Which means that the terminal can be crimped either direction.
- All the terminals are tin plated to avoid oxidation and to achieve maximum corrosion protection.
- Material: Copper (ETP) IS 1897
- Finish: Electro tin to BS 1872 (1984)


Nominal Cross Section mm ²	PESSRL CAT NO.	Size of Bolt Die	A	C	D	F	B	L-1	J
2.5	PESR-7015	10.2	2.3	3.9	16	0.8	5	17	25
	PESR-7151	10.2	2.3	3.9	18	0.8	5	20	29
	PESR-7047	12.7	2.3	3.9	18	0.8	5	20	29
4-6	PESR-7050	5.2	3.5	5.5	8	1	6	13	17
	PESR-7155	4.2	3.5	5.5	8	1	6	13	17
	PESR-7112	4.2	3.5	5.5	10	1	6	14	19
	PESR-7016	5.2	3.5	5.5	10	1	6	14	19
	PESR-7113	5.2	3.5	5.5	12	1	6	14	20
	PESR-7017	6.4	3.5	5.5	12	1	6	14	20
	PESR-7018	8.2	3.5	5.5	12	1	6	14	20
	PESR-7114	5.2	3.5	5.5	12	1	6	16	22
	PESR-7019	6.4	3.5	5.5	12	1	6	16	22
	PESR-7157	5.2	3.5	5.5	8	1	6	18.8	22.8
	PESR-7115	6.4	3.5	5.5	14	1	6	18.5	25.5
	PESR-7020	8.2	3.5	5.5	14	1	6	18.5	25.5
	PESR-7021	9.7	3.5	5.5	14	1	6	18.5	25.5
	PESR-7116	8.2	3.5	5.5	16	1	6	22	30
	PESR-7022	10.2	3.5	5.5	16	1	6	22	30
	PESR-7117	8.2	3.5	5.5	18	1	6	21	30
	PESR-7023	10.2	3.5	5.5	18	1	6	21	30
	PESR-7024	12.7	3.5	5.5	18	1	6	21	30
10	PESR-7119	4.2	4.3	6.3	10	1	8	15	20
	PESR-7026	5.2	4.3	6.3	10	1	8	15	20
	PESR-7118	4.2	4.3	6.3	10	1	8	17	22
	PESR-7025	5.2	4.3	6.3	10	1	8	17	22
	PESR-7120	6.4	4.3	6.3	12	1	8	17	23
	PESR-7121	8.2	4.3	6.3	16	1	8	19	27
	PESR-7122	8.2	4.3	6.3	18	1	8	21	30
	PESR-7027	10.2	4.3	6.3	18	1	8	21	30

COPPER RING CABLE LUG

CRIMPING TYPE TINNED COPPER RING CABLE TERMINAL END



PESSRL Ring Type Light Duty Cable Lugs are widely used in various applications such as power distribution, industrial machinery, automotive systems, and renewable energy installations, where durable and efficient electrical connections are essential.


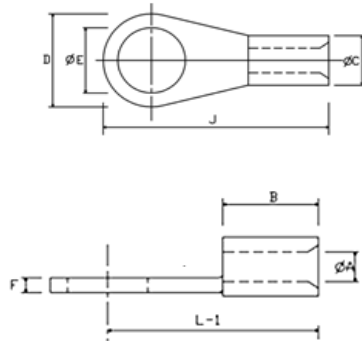


- The terminal barrel is brazed and soft annealed, Which means that the terminal can be crimped either direction.
- All the terminals are tin plated to avoid oxidation and to achieve maximum corrosion protection.
- Material: Copper (ETP) IS 1897
- Finish: Electro tin to BS 1872 (1984)


Nominal Cross Section mm ²	PESSRL CAT NO.	Size of Bolt Die	A	C	D	F	B	L-1	J
10	PESR-7028	12.7	4.3	6.3	22	1	8	23	34
	PESR-7123	10.2	4.3	6.3	22	1	8	23	34
16	PESR-7124	5.2	5.6	8	10	1.2	10	19	24
	PESR-7125	5.2	5.6	8	12	1.2	10	20	26
	PESR-7029	6.4	5.6	8	12	1.2	10	20	26
	PESR-7126	6.4	5.6	8	16	1.2	10	22	30
	PESR-7030	8.2	5.6	8	16	1.2	10	22	30
	PESR-7031	9.7	5.6	8	16	1.2	10	22	30
	PESR-7127	8.2	5.6	8	18	1.2	10	24	33
	PESR-7032	10.2	5.6	8	18	1.2	10	24	33
	PESR-7128	10.2	5.6	8	22	1.2	10	24	35
	PESR-7033	12.7	5.6	8	22	1.2	10	24	35
	PESR-7129	6.4	7.5	11.1	16	1.8	11	22	30
	PESR-7034	8.2	7.5	11.1	16	1.8	11	22	30
25	PESR-7035	10.2	7.5	11.1	16	1.8	11	22	30
	PESR-7156	6.4	7.5	11.1	12	1.8	11	25	31
	PESR-7051	8.2	7.5	11.1	12	1.8	11	25	31
	PESR-7130	6.4	7.5	11.1	16	1.8	11	25	33
	PESR-7036	8.2	7.5	11.1	16	1.8	11	25	33
	PESR-7131	10.2	7.5	11.1	18	1.8	11	25	34
	PESR-7132	10.2	7.5	11.1	22	1.8	11	31	42
	PESR-7037	12.7	7.5	11.1	22	1.8	11	31	42
35	PESR-7133	6.4	9	12.6	16	1.8	12	23	31
	PESR-7038	8.2	9	12.6	16	1.8	12	23	31
	PESR-7134	8.2	9	12.6	18	1.8	12	27	36
	PESR-7039	10.2	9	12.6	18	1.8	12	27	36
	PESR-7135	10.2	9	12.6	22	1.8	12	31	42
	PESR-7040	12.7	9	12.6	22	1.8	12	31	42

COPPER RING CABLE LUG

CRIMPING TYPE TINNED COPPER RING CABLE TERMINAL END



PESSRL Ring Type Light Duty Cable Lugs are widely used in various applications such as power distribution, industrial machinery, automotive systems, and renewable energy installations, where durable and efficient electrical connections are essential.

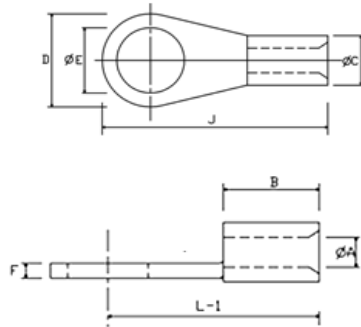

- The terminal barrel is brazed and soft annealed, Which means that the terminal can be crimped either direction.
- All the terminals are tin plated to avoid oxidation and to achieve maximum corrosion protection.
- Material: Copper (ETP) IS 1897
- Finish: Electro tin to BS 1872 (1984)

Nominal Cross Section mm ²	PESSRL CAT NO.	Size of Bolt Die	A	C	D	F	B	L-1	J
50	PESR-7136	8.2	10.5	14.1	18	1.8	16	34	43
	PESR-7041	10.2	10.5	14.1	18	1.8	16	34	43
	PESR-7137	10.2	10.5	14.1	22	1.8	16	32	43
	PESR-7138	10.2	10.5	14.1	24	1.8	16	36	48
	PESR-7042	12.7	10.5	14.1	24	1.8	16	36	48
	PESR-7139	16.2	10.5	14.1	32	1.8	16	38	54
70	PESR-7140	10.2	12	16	22	2	18	36	47
	PESR-7043	12.7	12	16	22	2	18	36	47
	PESR-7141	12.7	12	16	24	2	18	36	48
	PESR-7142	16.2	12	16	28	2	18	40	54
	PESR-7143	10.2	13.5	18.1	22	2.3	20	35	46
95	PESR-7144	10.2	13.5	18.1	24	2.3	20	38	50
	PESR-7044	12.7	13.5	18.1	24	2.3	20	38	50
	PESR-7145	16.2	13.5	18.1	28	2.3	20	44	58
	PESR-7146/A	10.2	15	20.2	26	2.6	22	39	52
120	PESR-7146	12.7	15	20.2	26	2.6	22	39	52
	PESR-7147	16.2	15	20.2	32	2.6	22	48	64
	PESR-7148	20.3	15	20.2	40	2.6	22	52	72
	PESR-7149	12.7	16.5	23.7	34	3.6	24	49	66
150	PESR-7045	16.2	16.5	23.7	34	3.6	24	49	66
	PESR-7150	16.2	16.5	23.7	40	3.6	24	54	74
	PESR-7046	20	16.5	23.7	40	3.6	24	54	74